




Measuring max leech:
 Fix the measurer edge to the swivel shackle and hoist the jib halyard to the top. Place the measurer towards the jib track and measure from the swivel shackle to the upper part of the clew traveler.

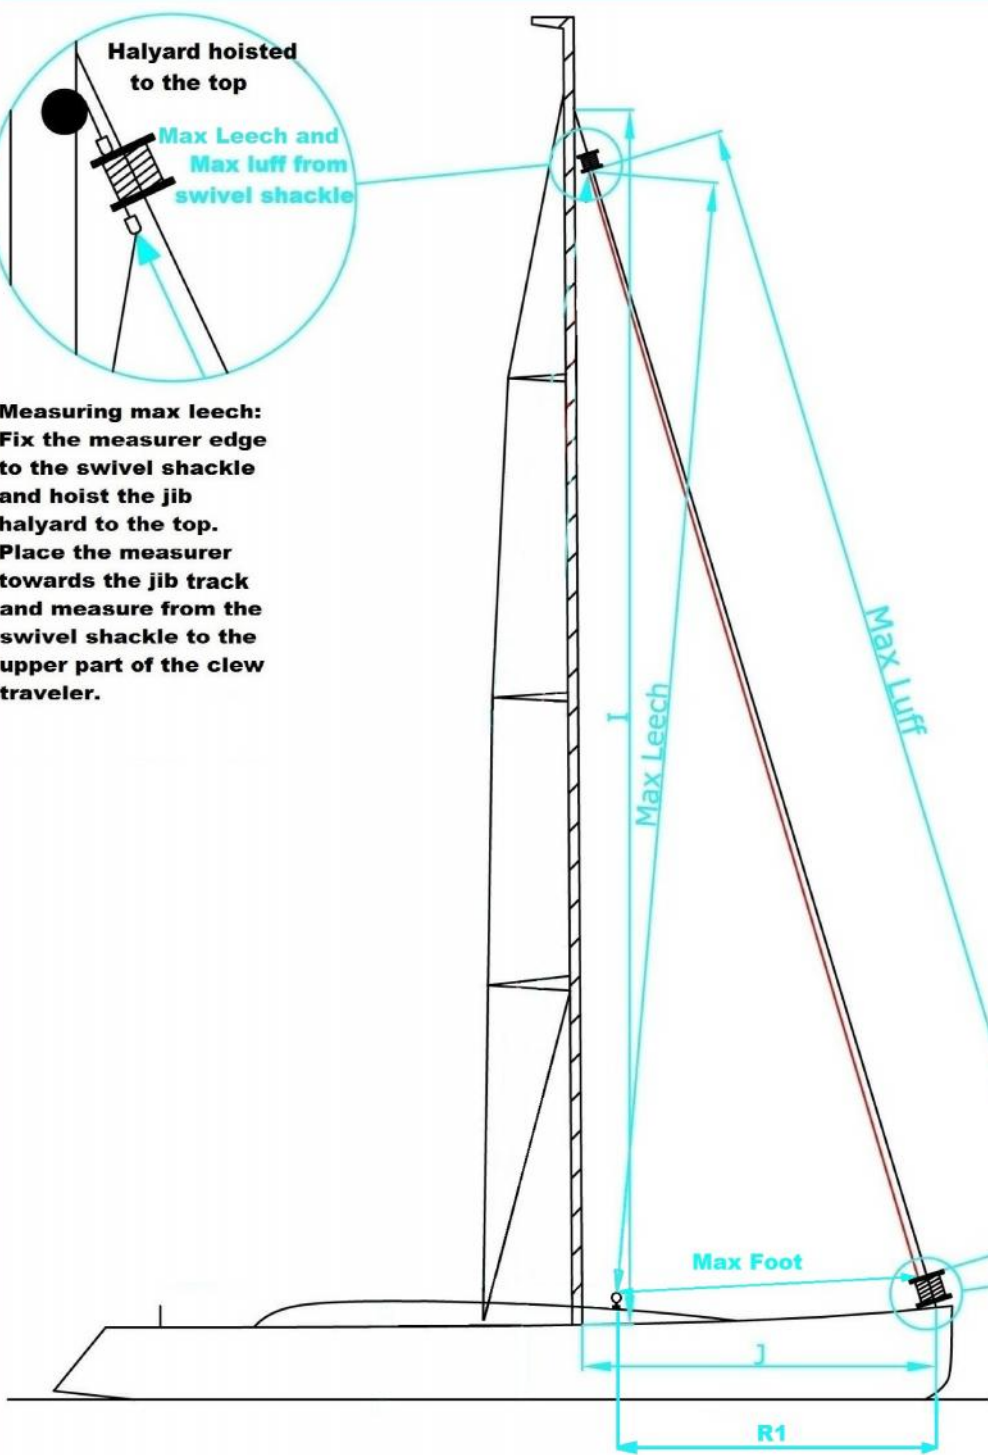


Max Luff	
From swivel shackle to tack point	
Max Foot	
From tack point to clew traveler	
R1	
Forestay fixing point - front track end	
Cut Back	
From tack point to luff groove	
Max Leech	
From swivel shackle to clew traveler	
H Drum	
From tack point to forestay fixing point	
H Groove	
From tack point to luff groove	

UV Band

Left ☐ clockwise closing

Right ☐ counterclockwise closing



Int	
Est	
I	
J	

How to use the measurer

Dimensions has to be reported from the 0. If the 0 is not coinciding with the edge, fold the measurer on itself until the 0 lays on the edge and fix it with some tape.

NO

0 = edge

Fold and fix with tape



Furling Self Tacking Jib Form